
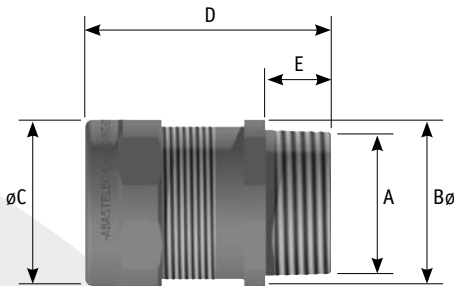


Prensacable para cables con armadura

Prensacable para cables sin armadura

DIMENSIONES

DIMENSIONES

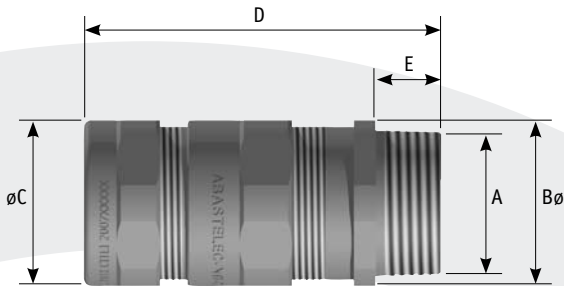

CÓDIGO	A (Diámetro de rosca)	DIMENSIONES				Ajuste bajo armadura (Min-Máx)	Ajuste sobre vaina exterior (Min-Máx)
		B	C	D	E		
AMPR1x-A0308	1/2"-M20	25,40	22,20	77	15	3-8	7-14
AMPR1x-A0611	1/2"-M20	31,75	31,75	77	15	6-11	10-17
AMPR2x-A0611	3/4"-M25						
AMPR1x-A0914	1/2"-M20	31,75	31,75	77	15	9-14	13-20
AMPR1x-A0914	3/4"-M25						
AMPR2x-A1217	3/4"-M25	34,93	34,93	77	15	12-17	15-23
AMPR3x-A1217	1"-M32						
AMPR2x-A1419	3/4"-M25	38,10	38,00	77	15	14-19	19-26
AMPR3x-A1419	1"-M32						
AMPR3x-A1722	1"-M32	38,10	38,00	82	15	17-22	23-29
AMPR3x-A1925	1"-M32	41,28	41,28	82	15	19-25	25-31
AMPR4x-A2228	1 1/4"-M40	50,80	50,80	92	19,5	22-28	27-33
AMPR4x-A2531	1 1/4"-M40	50,80	50,80	92	19,5	25-31	30-36
AMPR5x-A2834	1 1/2"-M50	57,20	57,20	92	19,5	28-34	33-39
AMPR5x-A3238	1 1/2"-M50	57,20	57,20	92	19,5	32-38	37-43
AMPR6x-A3238	2"-M63	63,50	63,50	92	19,5	36-42	41-47

CÓDIGO	A (Diámetro de rosca)	DIMENSIONES				Ajuste sobre vaina exterior (Min-Máx)
		B	C	D	E	
AMPR1x-N0308	1/2"-M20	25,4	22,20	51	15	3-8
AMPR1x-N0611	1/2"-M20	31,75	31,75	51	15	6-11
AMPR2x-N0611	3/4"-M25					
AMPR1x-N0914	1/2"-M20	31,75	31,75	51	15	9-14
AMPR2x-N0914	3/4"-M25					
AMPR2x-N1217	3/4"-M25	34,93	34,93	51	15	12-17
AMPR3x-N1217	1"-M32					
AMPR2x-N1419	3/4"-M25	38,10	38,00	51	15	14-19
AMPR3x-N1419	1"-M32					
AMPR3x-N1722	1"-M32	38,10	38,00	56	15	17-22
AMPR3x-N1925	1"-M32	41,28	41,28	56	15	19-25
AMPR4x-N2228	1 1/4"-M40	50,80	50,80	66	19,5	22-28
AMPR4x-N2531	1 1/4"-M40	50,80	50,80	66	19,5	25-31
AMPR5x-N2834	1 1/2"-M50	57,20	57,20	66	19,5	28-34
AMPR5x-N3238	1 1/2"-M50	57,20	57,20	66	19,5	32-38
AMPR6x-N3642	2"-M63	63,50	63,50	66	19,5	36-42